

## HKZ EXTRA LOW IMPEDANCE ELECTROLYTIC CAPACITOR

Extra low impedance with temperature range -55~+105°C

Impedance 40~60% less than HLZ series


RoHS & REACH compliant, Halogen-free

### SPECIFICATIONS


Items	Characteristics																																			
Operation Temperature Range	-55 ~ +105°C																																			
Voltage Range	6.3 ~ 50V																																			
Capacitance Range	4.7 ~ 4700μF																																			
Capacitance Tolerance	±20% at 120Hz, 20°C																																			
Leakage Current	Leakage current ≤0.01CV or 3μA (∅4~∅10), whichever is greater (after 2 minutes application of rated voltage at 20°C) Leakage current ≤0.03CV or 4μA (∅12.5~∅16), whichever is greater (after 1 minute application of rated voltage at 20°C) C: Nominal capacitance (μF) , V: Rated voltage (V)																																			
Dissipation Factor (tan δ)	Measurement frequency : 120Hz, Temperature : 20°C <table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>tan δ (max.)</td> <td>∅4~∅10</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> </tr> <tr> <td></td> <td>∅12.5~∅16</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </tbody> </table>	Rated Voltage (V)	6.3	10	16	25	35	50	tan δ (max.)	∅4~∅10	0.22	0.19	0.16	0.14	0.12	0.12		∅12.5~∅16	0.26	0.22	0.18	0.16	0.14	0.12												
Rated Voltage (V)	6.3	10	16	25	35	50																														
tan δ (max.)	∅4~∅10	0.22	0.19	0.16	0.14	0.12	0.12																													
	∅12.5~∅16	0.26	0.22	0.18	0.16	0.14	0.12																													
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance Ratio</td> <td rowspan="2">∅4~∅10</td> <td>Z(-25°C) / Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C) / Z(20°C)</td> <td>5</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> <tr> <td rowspan="2">ZT/Z20 (max.)</td> <td rowspan="2">∅12.5~∅16</td> <td>Z(-25°C) / Z(20°C)</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C) / Z(20°C)</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> </tr> </tbody> </table>	Rated Voltage (V)	6.3	10	16	25	35	50	Impedance Ratio	∅4~∅10	Z(-25°C) / Z(20°C)	2	2	2	2	2	Z(-55°C) / Z(20°C)	5	4	4	3	3	ZT/Z20 (max.)	∅12.5~∅16	Z(-25°C) / Z(20°C)	3	3	2	2	2	Z(-55°C) / Z(20°C)	10	8	6	4	3
Rated Voltage (V)	6.3	10	16	25	35	50																														
Impedance Ratio	∅4~∅10	Z(-25°C) / Z(20°C)	2	2	2	2	2																													
		Z(-55°C) / Z(20°C)	5	4	4	3	3																													
ZT/Z20 (max.)	∅12.5~∅16	Z(-25°C) / Z(20°C)	3	3	2	2	2																													
		Z(-55°C) / Z(20°C)	10	8	6	4	3																													
Load Life	After 3000 hrs. (1000 hrs. for ∅4~∅6.3×5.8, 2000 hrs. for ∅6.3×7.7 & ∅8) application of the rated voltage at 105°C, they meet the characteristics listed below. <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±25% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>200% or less of initial specified value</td> </tr> <tr> <td>Leakage Current</td> <td>initial specified value or less</td> </tr> </tbody> </table>	Capacitance Change	Within ±25% of initial value	Dissipation Factor	200% or less of initial specified value	Leakage Current	initial specified value or less																													
Capacitance Change	Within ±25% of initial value																																			
Dissipation Factor	200% or less of initial specified value																																			
Leakage Current	initial specified value or less																																			
Shelf Life	After leaving capacitors under no load at 105°C for 1000 hours, they meet the specified value for load life characteristics listed above.																																			
Resistance to Soldering Heat	After reflow soldering and restored at room temperature, they meet the characteristics listed below. <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>initial specified value or less</td> </tr> <tr> <td>Leakage Current</td> <td>initial specified value or less</td> </tr> </tbody> </table>	Capacitance Change	Within ±10% of initial value	Dissipation Factor	initial specified value or less	Leakage Current	initial specified value or less																													
Capacitance Change	Within ±10% of initial value																																			
Dissipation Factor	initial specified value or less																																			
Leakage Current	initial specified value or less																																			
Marking	Black print on the case top.																																			

### DRAWING (Unit: mm)

(∅4~∅6.3×7.7)

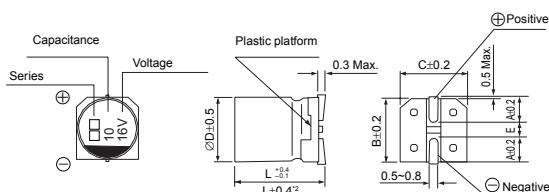

(∅8×10.5~∅16)

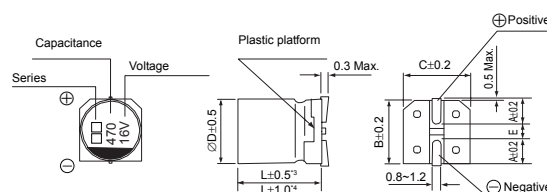

- \*1. Voltage mark for 6.3V is [6V]
- \*2. Applicable to ∅6.3×7.7
- \*3. Applicable to ∅8×10.5~∅10
- \*4. Applicable to ∅12.5~∅16

**DIMENSIONS (Unit: mm)**

∅D x L	4 x 5.8	5 x 5.8	6.3 x 5.8	6.3 x 7.7	8 x 10.5	10 x 10.5	10 x 13.5	12.5 x 13.5	12.5 x 16	16 x 16.5
<b>A</b>	2.0	2.2	2.6	2.6	3.0	3.3	3.3	4.9	4.9	5.8
<b>B</b>	4.3	5.3	6.6	6.6	8.4	10.4	10.4	13.0	13.0	17.0
<b>C</b>	4.3	5.3	6.6	6.6	8.4	10.4	10.4	13.0	13.0	17.0
<b>E ± 0.2</b>	1.0	1.4	1.9	1.9	3.1	4.7	4.7	4.7	4.7	6.4
<b>L</b>	5.8	5.8	5.8	7.7	10.5	10.5	13.5	13.5	16.0	16.5

**DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT & IMPEDANCE**

WV Code μF		6.3			10			16		
		Case size	Impedance	Ripple current	Case size	Impedance	Ripple current	Case size	Impedance	Ripple current
<b>10</b>	<b>106</b>							4 x 5.8	1.8	80
<b>15</b>	<b>156</b>							4 x 5.8	1.8	80
<b>22</b>	<b>226</b>	4 x 5.8	1.8	80	4 x 5.8	1.8	80	5 x 5.8 (4 x 5.8)	0.76 (1.8)	150 (80)
<b>33</b>	<b>336</b>	5 x 5.8 (4 x 5.8)	0.76 (1.8)	150 (80)	5 x 5.8 (4 x 5.8)	0.76 (1.8)	150 (80)	6.3 x 5.8 (5 x 5.8)	0.44 (0.76)	230 (150)
<b>47</b>	<b>476</b>	5 x 5.8 (4 x 5.8)	0.76 (1.8)	150 (80)	6.3 x 5.8 (5 x 5.8)	0.44 (0.76)	230 (150)	6.3 x 5.8 (5 x 5.8)	0.44 (0.76)	230 (150)
<b>56</b>	<b>566</b>	5 x 5.8	0.76	150	6.3 x 5.8	0.44	230	6.3 x 5.8	0.44	230
<b>68</b>	<b>686</b>	6.3 x 5.8 (5 x 5.8)	0.44 (0.76)	230 (150)	6.3 x 5.8	0.44	230	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	280 (230)
<b>100</b>	<b>107</b>	6.3 x 5.8 (5 x 5.8)	0.44 (0.76)	230 (150)	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	280 (230)	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	280 (230)
<b>150</b>	<b>157</b>	6.3 x 5.8	0.44	230	6.3 x 7.7	0.34	280	6.3 x 7.7	0.34	280
<b>220</b>	<b>227</b>	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	280 (230)	6.3 x 7.7	0.34	280	8 x 10.5 (6.3 x 7.7)	0.17 (0.34)	450 (280)
<b>330</b>	<b>337</b>	6.3 x 7.7	0.34	280	8 x 10.5	0.17	450	10 x 10.5 (8 x 10.5)	0.09 (0.17)	670 (450)
<b>470</b>	<b>477</b>	8 x 10.5	0.17	450	8 x 10.5	0.17	450	10 x 10.5 (8 x 10.5)	0.09 (0.17)	670 (450)
<b>680</b>	<b>687</b>	10 x 10.5 (8 x 10.5)	0.09 (0.17)	670 (450)	10 x 10.5	0.09	670	10 x 13.5 (10 x 10.5)	0.075 (0.09)	800 (670)
<b>1000</b>	<b>108</b>	10 x 10.5 (8 x 10.5)	0.09 (0.17)	670 (450)	10 x 10.5	0.09	670	16 x 16.5 (12.5 x 16) (12.5 x 13.5)	0.055 (0.06) (0.065)	1350 (1050) (900)
<b>1500</b>	<b>158</b>	10 x 13.5 (10 x 10.5)	0.075 (0.09)	800 (670)	12.5 x 13.5	0.065	900	16 x 16.5	0.055	1350
<b>2200</b>	<b>228</b>	12.5 x 13.5	0.065	900	12.5 x 16	0.06	1050	16 x 16.5	0.055	1350
<b>3300</b>	<b>338</b>	12.5 x 16	0.06	1050	16 x 16.5	0.055	1350			
<b>4700</b>	<b>478</b>	16 x 16.5	0.055	1350						

WV Code μF		25			35			50		
		Case size	Impedance	Ripple current	Case size	Impedance	Ripple current	Case size	Impedance	Ripple current
<b>4.7</b>	<b>475</b>				4 x 5.8	1.8	80	5 x 5.8 (4 x 5.8)	1.52 (3.0)	85 (60)
<b>10</b>	<b>106</b>	4 x 5.8	1.8	80	5 x 5.8 (4 x 5.8)	0.76 (1.8)	150 (80)	6.3 x 5.8 (5 x 5.8)	0.88 (1.52)	165 (85)
<b>15</b>	<b>156</b>	5 x 5.8	0.76	150	5 x 5.8	0.76	150	6.3 x 5.8	0.88	165
<b>22</b>	<b>226</b>	6.3 x 5.8 (5 x 5.8)	0.44 (0.76)	230 (150)	6.3 x 5.8 (5 x 5.8)	0.44 (0.76)	230 (150)	6.3 x 7.7 (6.3 x 5.8)	0.68 (0.88)	185 (165)
<b>33</b>	<b>336</b>	6.3 x 5.8 (5 x 5.8)	0.44 (0.76)	230 (150)	6.3 x 5.8	0.44	230	6.3 x 7.7	0.68	185
<b>47</b>	<b>476</b>	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	280 (230)	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	280 (230)	6.3 x 7.7	0.68	185
<b>56</b>	<b>566</b>	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	280 (230)	6.3 x 7.7	0.34	280	8 x 10.5 (6.3 x 7.7)	0.34 (0.68)	350 (185)
<b>68</b>	<b>686</b>	6.3 x 7.7	0.34	280	6.3 x 7.7	0.34	280	8 x 10.5	0.34	350
<b>100</b>	<b>107</b>	6.3 x 7.7	0.34	280	8 x 10.5	0.17	450	10 x 10.5 (8 x 10.5)	0.18 (0.34)	670 (350)
<b>150</b>	<b>157</b>	8 x 10.5 (6.3 x 7.7)	0.17 (0.34)	450 (280)	10 x 10.5	0.09	670	10 x 10.5	0.18	670

**DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT & IMPEDANCE**

WV μF Code		25			35			50		
		Case size	Impedance	Ripple current	Case size	Impedance	Ripple current	Case size	Impedance	Ripple current
220	227	8 × 10.5	0.17	450	10 × 10.5	0.09	670	10 × 13.5 (10 × 10.5)	0.16 (0.18)	750 (670)
330	337	10 × 10.5 (8 × 10.5)	0.09 (0.17)	670 (450)	10 × 10.5	0.09	670	12.5 × 13.5	0.14	800
470	477	10 × 13.5 (10 × 10.5)	0.075 (0.09)	800 (670)	12.5 × 13.5 (10 × 13.5)	0.065 (0.075)	900 (800)	16 × 16.5 (12.5 × 16)	0.10 (0.12)	1150 (900)
680	687	12.5 × 13.5	0.065	900	12.5 × 16 (12.5 × 13.5)	0.060 (0.065)	1050 (900)			
1000	108	16 × 16.5 (12.5 × 16)	0.055 (0.060)	1350 (1050)	16 × 16.5	0.055	1350			
1500	158	16 × 16.5	0.055	1350						

WV μF Code		100		
		Case size	Impedance	Ripple current
10	106	8 × 10.5	1.8	110

**FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT**

Frequency		50Hz	120Hz	300Hz	1KHz	10KHz~
Coefficient	Ø4 ~ Ø10	4.7 ~ 68μF	0.35	0.50	0.64	0.83
		100 ~ 1500μF	0.40	0.55	0.70	0.85
	Ø12.5 ~ Ø16	~ 680μF	0.45	0.65	0.80	0.90
		1000 ~ 4700μF	0.65	0.85	0.95	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5~10°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

**◆ How to order**

<b>HKZ</b>	<b>106</b>	<b>M</b>	<b>0035</b>	<b>0405</b>	<b>R</b>	<b>-</b>
↓	↓	↓	↓	↓	↓	↓
<u>Type</u>	<u>Capacitance code</u>	<u>Tolerance</u>	<u>Rated Voltage</u>	<u>Size Code</u>	<u>Package</u>	<u>Additional characters may be added for special requirements</u>
HKZ	pF Code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) 106 = 10uF 107 = 100uF	M: +/-20%	Code 0035: 35VDC For DC Voltage 0006: 6.3VDC 0035: 35VDC 0050: 50VDC	Code 0405: Size 4x5.8mm Size for V-chip E-cap 0405: Size 4x5.8mm 1010: Size 10x10.5mm 1616: Size 16x16.5mm	R: Tape & Reel	

Note: Specification is subject to change without further notice. For more details and updates, please visit our website.