



## HKZ EXTRA LOW IMPEDANCE ELECTROLYTIC CAPACITOR

Extra low impedance with temperature range -55~+105°C

Impedance 40~60% less than HLZ series


RoHS & REACH compliant, Halogen-free

### SPECIFICATIONS


Items	Characteristics																																					
Operation Temperature Range	-55 ~ +105°C																																					
Voltage Range	6.3 ~ 50V																																					
Capacitance Range	4.7 ~ 4700µF																																					
Capacitance Tolerance	±20% at 120Hz, 20°C																																					
Leakage Current	Leakage current ≤0.01CV or 3µA (∅4~∅10), whichever is greater (after 2 minutes application of rated voltage at 20°C) Leakage current ≤0.03CV or 4µA (∅12.5~∅16), whichever is greater (after 1 minute application of rated voltage at 20°C) C: Nominal capacitance (µF) , V: Rated voltage (V)																																					
Dissipation Factor (tan δ)	Measurement frequency : 120Hz, Temperature : 20°C <table border="1"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td rowspan="2">tan δ (max.)</td> <td>∅4~∅10</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> </tr> <tr> <td>∅12.5~∅16</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> </table>	Rated Voltage (V)	6.3	10	16	25	35	50	tan δ (max.)	∅4~∅10	0.22	0.19	0.16	0.14	0.12	0.12	∅12.5~∅16	0.26	0.22	0.18	0.16	0.14	0.12															
Rated Voltage (V)	6.3	10	16	25	35	50																																
tan δ (max.)	∅4~∅10	0.22	0.19	0.16	0.14	0.12	0.12																															
	∅12.5~∅16	0.26	0.22	0.18	0.16	0.14	0.12																															
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <tr> <td>Rated Voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td rowspan="4">Impedance Ratio ZT/Z20 (max.)</td> <td rowspan="2">∅4~∅10</td> <td>Z(-25°C) / Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C) / Z(20°C)</td> <td>5</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> <tr> <td rowspan="2">∅12.5~∅16</td> <td>Z(-25°C) / Z(20°C)</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C) / Z(20°C)</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>	Rated Voltage (V)	6.3	10	16	25	35	50	Impedance Ratio ZT/Z20 (max.)	∅4~∅10	Z(-25°C) / Z(20°C)	2	2	2	2	2	Z(-55°C) / Z(20°C)	5	4	4	3	3	3	∅12.5~∅16	Z(-25°C) / Z(20°C)	3	3	2	2	2	2	Z(-55°C) / Z(20°C)	10	8	6	4	3	3
Rated Voltage (V)	6.3	10	16	25	35	50																																
Impedance Ratio ZT/Z20 (max.)	∅4~∅10	Z(-25°C) / Z(20°C)	2	2	2	2	2																															
		Z(-55°C) / Z(20°C)	5	4	4	3	3	3																														
	∅12.5~∅16	Z(-25°C) / Z(20°C)	3	3	2	2	2	2																														
		Z(-55°C) / Z(20°C)	10	8	6	4	3	3																														
Load Life	After 3000 hrs. (1000 hrs. for ∅4~∅6.3×5.8, 2000 hrs. for ∅6.3×7.7 & ∅8) application of the rated voltage at 105°C, they meet the characteristics listed below. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±25% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>200% or less of initial specified value</td> </tr> <tr> <td>Leakage Current</td> <td>initial specified value or less</td> </tr> </table>	Capacitance Change	Within ±25% of initial value	Dissipation Factor	200% or less of initial specified value	Leakage Current	initial specified value or less																															
Capacitance Change	Within ±25% of initial value																																					
Dissipation Factor	200% or less of initial specified value																																					
Leakage Current	initial specified value or less																																					
Shelf Life	After leaving capacitors under no load at 105°C for 1000 hours, they meet the specified value for load life characteristics listed above.																																					
Resistance to Soldering Heat	After reflow soldering and restored at room temperature, they meet the characteristics listed below. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>initial specified value or less</td> </tr> <tr> <td>Leakage Current</td> <td>initial specified value or less</td> </tr> </table>	Capacitance Change	Within ±10% of initial value	Dissipation Factor	initial specified value or less	Leakage Current	initial specified value or less																															
Capacitance Change	Within ±10% of initial value																																					
Dissipation Factor	initial specified value or less																																					
Leakage Current	initial specified value or less																																					
Marking	Black print on the case top.																																					

### DRAWING (Unit: mm)

(∅4~∅6.3×7.7)

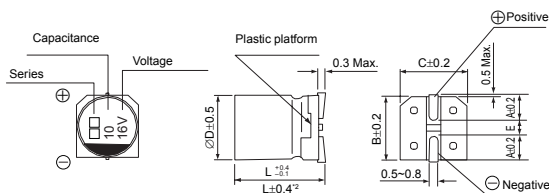

(∅8×10.5~∅16)

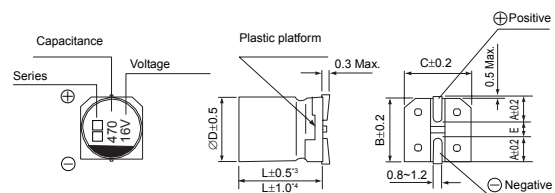

\*1. Voltage mark for 6.3V is [6V]  
\*2. Applicable to ∅6.3×7.7  
\*3. Applicable to ∅8×10.5~∅10  
\*4. Applicable to ∅12.5~∅16