

◆ Features

Low impedance with temperature range $-55\sim+105^{\circ}\text{C}$

Load life of 1000~2000 hours

RoHS & REACH compliant, Halogen-free



◆ Specifications

Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Load life: 1000 ~ 2000 hrs.

Voltage: 6.3 ~ 50V DC


Capacitance: 1~ 4700uF

Tolerance: $\pm 20\%$ at 120Hz, 20°C


Size: 4x5.4, 5x5.4, 6.3x5.4, 6.3x7.7, 8x10.5, 10x10.5,
10x13.5, 12.5x13.5, 12.5x16, 16x16.5

◆ Drawing of HLZ Series

($\varnothing 4\sim\varnothing 6.3\times 7.7$) Unit: mm

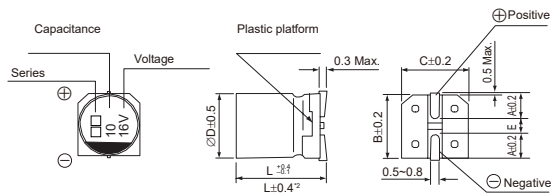

($\varnothing 8\times 10.5\sim\varnothing 16$) Unit: mm

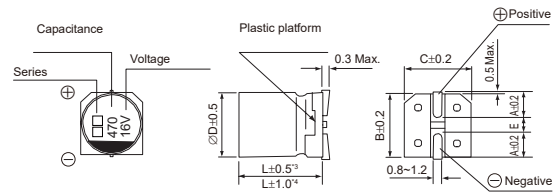

1. Voltage mark for 6.3V is [6V]
2. Applicable to $\varnothing 6.3\times 7.7$
3. Applicable to $\varnothing 8\times 10.5\sim\varnothing 10$
4. Applicable to $\varnothing 12.5\sim\varnothing 16$