

◆ Features

Operating with wide temperature range $-55\sim+105^{\circ}\text{C}$

Higher capacitance, ultra-low ESR, ripple current

Load life of 2000 hours

RoHS & REACH compliant, Halogen-free



◆ Specifications

Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Load life: 2000hours

Voltage: 2.5 ~ 16V DC


Capacitance: 100~ 1000 μF

Tolerance: $\pm 20\%$ at 120Hz, 20°C

Size: 5x5.5/5.8, 5x8/9, 6.3x5/6, 6x5.8/6.5, 6.3x7/7.7, 6.3x9, 8x6.7/7.7, 10x12

◆ Drawing of HMB Series

Unit: mm

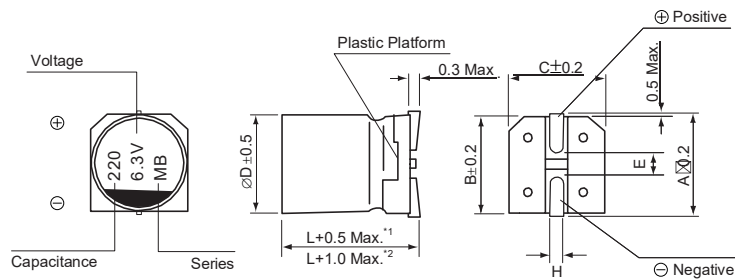

*1. Applicable to $\varnothing 5\sim\varnothing 8$

*2. Applicable to $\varnothing 10$ and above